


Materials

Rotary	- Cer / Sic / TC
Stationary	- Sic / Car / TC
Elastomer	- NBR / EPDM / Viton

Working Conditions

Pressure	≤ 10 bar
Speed	≤ 15 m/s
Temperature	up to 205°C

*L1T = Total working length

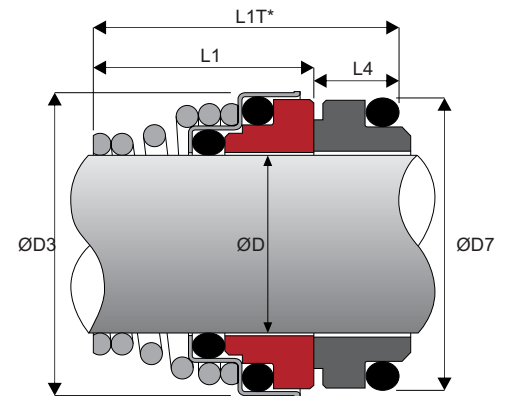

Shaft ØD Metric	ØD3	L1	SIT			SITD		
			L1T	L4	ØD7	L1T	L4	ØD7
10	19.5	15	20.5	5.5	18.1	22	7	21
11	22.0	18	23.5	5.5	20.6	-	-	-
12	23.0	18	23.5	5.5	20.6	25	7	23
13	25.0	22	28.0	6.0	23.1	-	-	-
14	25.0	22	28.0	6.0	23.1	29	7	25
15	28.7	22	29.0	7.0	26.9	-	-	-
16	28.7	23	30.0	7.0	26.9	30	7	27
17	28.7	23	30.0	7.0	26.9	-	-	-
18	32.7	24	32.0	8.0	30.9	34	10	33
19	32.7	25	33.0	8.0	30.9	-	-	-
20	32.7	25	33.0	8.0	30.9	35	10	35
21	37.5	25	33.0	8.0	35.4	-	-	-
22	37.5	25	33.0	8.0	35.4	35	10	37
23	37.5	27	35.0	8.0	35.4	-	-	-
24	37.5	27	35.0	8.0	35.4	37	10	39
25	40.0	27	35.5	8.5	38.2	37	10	40
28	45.5	29	38.0	9.0	43.3	39	10	43
29	45.5	30	39.0	9.0	43.3	-	-	-
30	45.5	30	39.0	9.0	43.3	40	10	45
32	45.5	30	39.0	9.0	43.3	40	10	48
33	48.0	39	50.5	11.5	53.5	49	10	48
35	50.0	39	50.5	11.5	53.5	49	10	50
38	56.0	39	50.5	11.5	60.5	52	13	56
40	58.0	39	50.5	11.5	60.5	52	13	58