




Size	Rating kW/1000 rpm	Nominal Torque (Nm)	Max RPM	L1	L (DBSE)		d1	D1	D2	L2 Bolt Removal
					Standard	Min				
4002	2	19	3600	26	100	54.1	25	35.5	62	40
4004	3	29	3600	30	100	56	30	41.5	74	40
4006	8	76	3600	40	100	69	40	56.5	97	52
4008	20	191	3600	46	100	83	48	66.5	118	63
4100	30	287	3600	60	100	91	62.5	87.5	144	64
4102	80	764	3600	80	100	99	81	113.5	175	75
4104	170	1624	3600	80	140	113	85.5	120	204	94
4106	260	2483	3600	95	140	113	100	144.5	228	94
6108	400	3820	3600	95	140	112	100	141	222	75
6200	560	5348	3600	107	140	133	115	162	248	91
6202	750	7163	3600	115	140	151	128	180	272	93
6204	1120	10696	3600	130	180	158	137	197	297	104

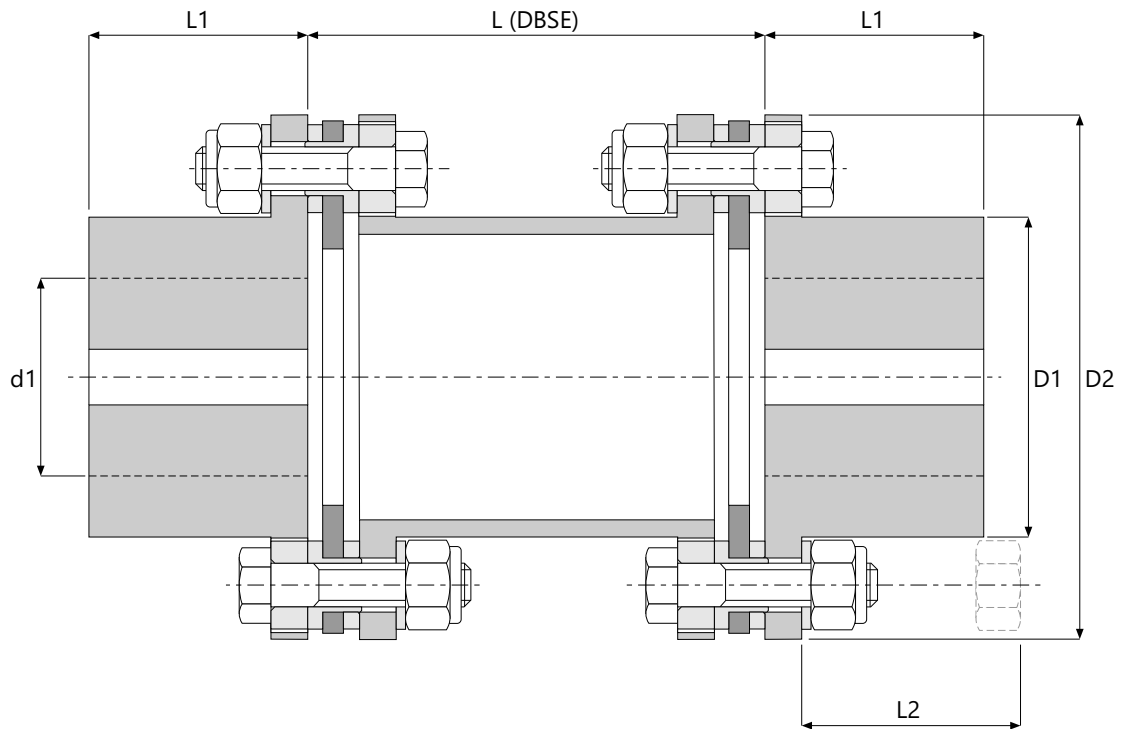


**Nexus
Seals**

Working With People to Engineer Solutions

CL Coupling MetaFlex

Imperial Coupling Data Sheet

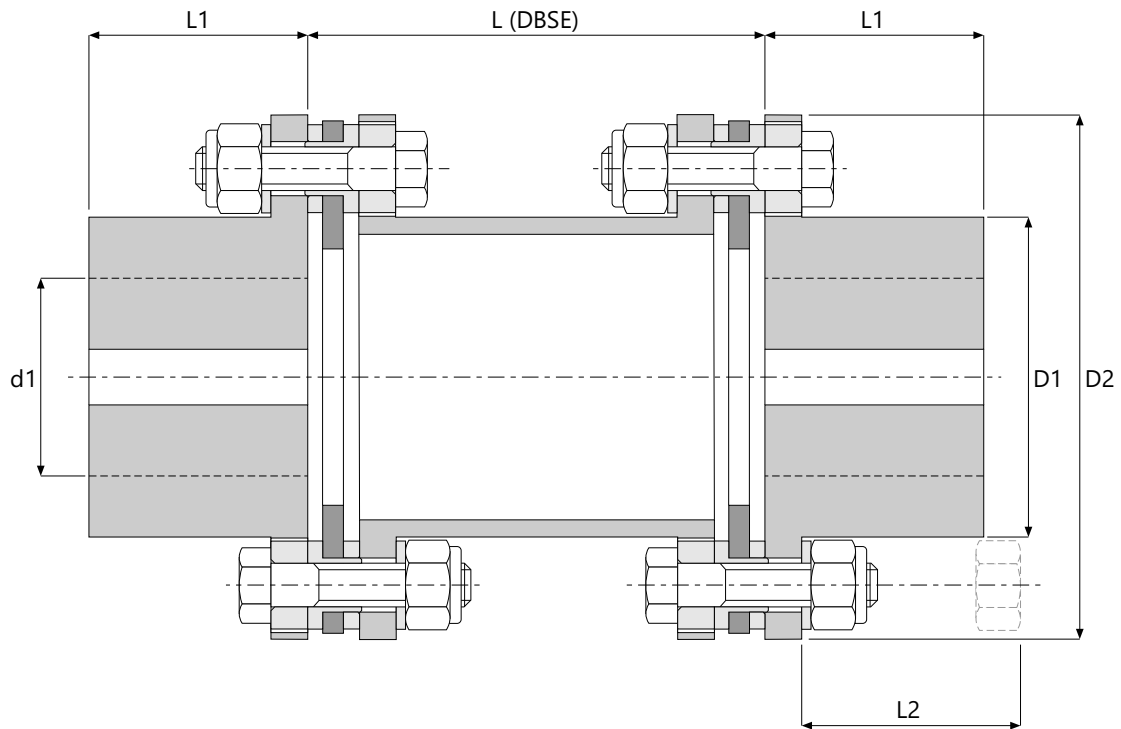

Size	Rating HP/100 rpm	Nominal Torque (lb.in)	Max RPM	L1	L (DBSE)		d1	D1	D2	L2 Bolt Removal
					Standard	Min				
4002	27	168	3600	1.020	3.940	2.130	0.980	1.400	2.440	1.570
4004	41	257	3600	1.180	3.940	2.200	1.180	1.630	2.910	1.570
4006	109	673	3600	1.570	3.940	2.720	1.570	2.220	3.820	2.050
4008	272	1690	3600	1.810	3.940	3.270	1.890	2.620	4.650	2.480
4100	408	2540	3600	2.360	3.940	3.580	2.460	3.440	5.670	2.520
4102	1088	6761	3600	3.150	3.940	3.900	3.190	4.470	6.890	2.950
4104	2312	14372	3600	3.150	5.510	4.450	3.370	4.720	8.030	3.700
4106	3536	21975	3600	3.740	5.510	4.450	3.940	5.690	8.980	3.700
6108	5440	33807	3600	3.740	5.510	4.410	3.940	5.550	8.740	2.950
6200	7616	47330	3600	4.210	5.510	5.240	4.530	6.380	9.760	3.580
6202	10200	63393	3600	4.530	5.510	5.940	5.040	7.090	10.710	3.660
6204	15232	94660	3600	5.120	7.090	6.220	5.390	7.760	11.690	4.090