



Materials


- Stationary - SiC / SSiC / TC
- Rotary - SiC / SSiC / TC
- Elastomer - NBR / EPDM / Viton / Aflas / FFKM

Working Conditions

- Pressure ≤ 28 bar
- Speed ≤ 25 m/s
- Temperature up to 205°C

Features

- Stationary design
- Monolithic faces
- Pressure balances
- Springs outside the media
- ± 2.5mm Axial movement
- connection for quench
- Exotic wetted metal parts

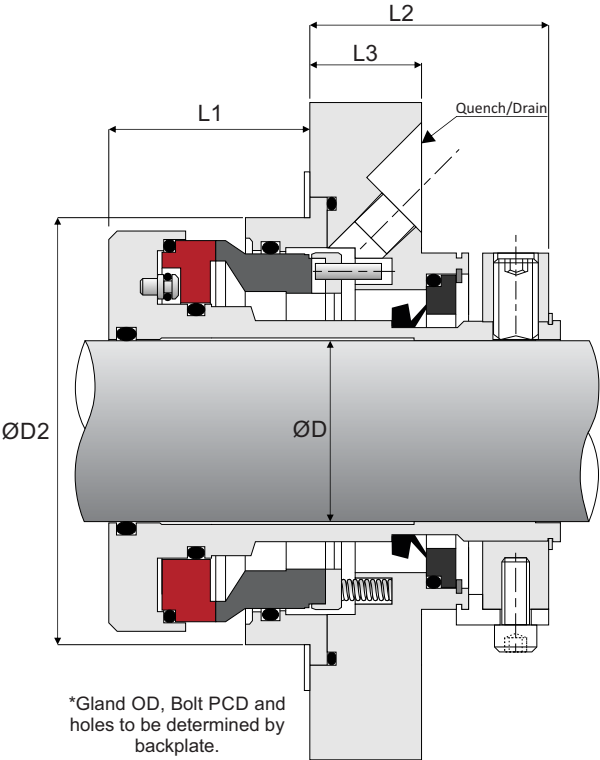

Shaft Ø		Min S-Box ØD2	L1	L2	L3
From	Max				
20.00	30.00	73.0	32.5	54.5	20.0
31.75	41.28	91.0	32.5	60.5	23.0
43.00	48.00	96.0	34.5	63.5	26.0
50.00	55.00	106.0	34.5	68.5	31.0
57.10	70.00	125.0	40.5	68.5	31.0
73.00	76.20	136.0	47.5	71.5	32.0
79.38	86.00	144.5	45.5	71.5	32.0
88.90	92.00	154.0	45.5	71.5	32.0
95.00	112.00	178.0	59.0	85.0	38.5
114.30	124.00	193.0	59.0	85.0	38.5
125.00	140.00	211.0	59.0	85.0	38.5
142.88	158.00	231.0	60.5	93.5	47.0
158.75	165.10	246.0	60.0	94.0	47.5
168.28	194.00	272.0	60.0	94.0	47.5
196.85	200.00	281.0	67.4	97.0	50.5
203.20	220.00	294.0	69.3	97.0	50.5