



Materials


- Stationary - SiC / SSiC / TC
- Rotary - SiC / SSiC / TC
- Elastomer - EPDM / Viton / Aflas / FFKM

Working Conditions

- Pressure ≤ 18 bar
- Speed ≤ 20 m/s
- Temperature up to 180°C

Features

- Stationary design
- Monolithic faces
- Pressure balanced
- Springs outside of media
- No slurry on dynamic o-ring

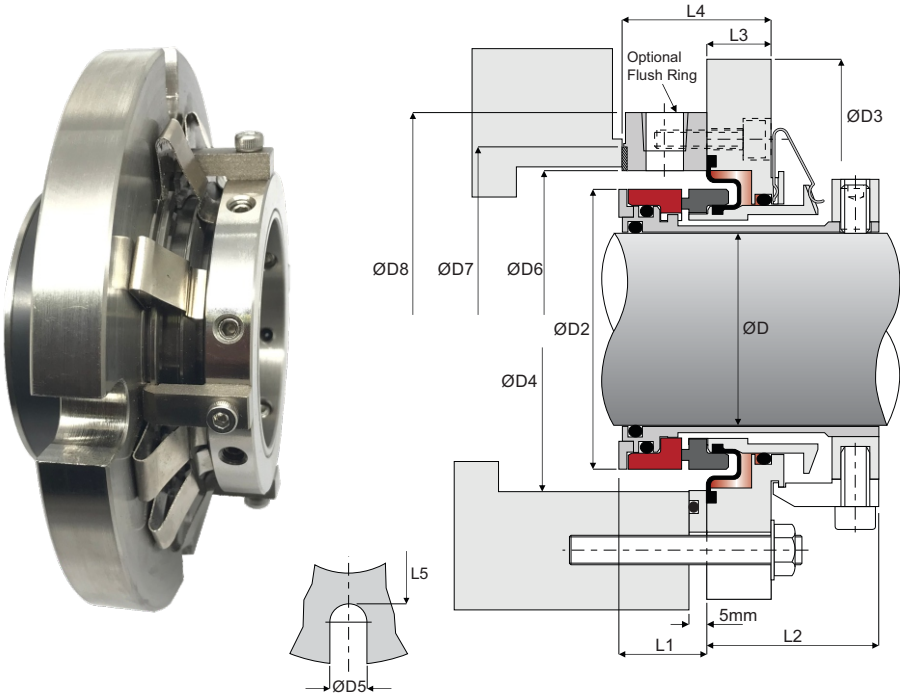

ØD Shaft Size	ØD2	ØD3 Gland Dimension	ØD5 Gland Bolt Slot	ØD6 Gasket ID	ØD7 Gasket OD	ØD8	L1	L2	L5
45	63	145	14	59.5	66	98	39.5	68	86
48	66	148	14	62.5	69	101	39.5	68	89
50	68	150	14	69.5	76	103	39.5	68	91
55	73	155	14	74.5	81	108	39.5	68	96
60	78	160	14	79.5	86	113	39.5	68	101
65	90	163	18	84.5	91	125	48	85	109
70	95	168	18	89.5	96	128	48	85	112
75	100	173	18	99.5	106	134	48	85	118
80	103	178	18	104.5	111	141	48	85	125
85	110	183	18	109.5	118	144	48	85	128
90	115	188	18	124.5	133	150	48	85	134
95	120	193	18	127.5	136	157	48	85	141
100	125	225	18	159.5	168	193	48	85	177
110	135	250	18	169.5	178	218	48	85	202
120	145	217	18	145.5	154	188	48	85	172
125	162	236	22	154.5	163	203	69.5	117	183
130	167	242	22	165.5	174	210	69.5	117	190
135	172	248	22	169.5	178	218	69.5	117	198
140	177	253	22	169.5	178	223	69.5	117	203
145	182	258	22	177.5	186	228	69.5	117	208
150	187	268	22	189.5	198	238	69.5	117	218
160	197	273	22	189.5	198	243	69.5	117	223
170	207	280	22	194.5	205	248	69.5	117	228
180	217	290	22	194.5	205	256	69.5	117	236
190	227	310	22	197.5	210	264	69.5	117	244
200	237	328	22	209.5	224	278	69.5	117	258